

The Technology Inside...

MeltBlown Mat

Primary Use:


Oil Spills on Land or Water

Primary Benefit:

Quick, Effective Oil-Only Cleanup

MeltBlown

Single layer of hydrophobic (oil-only) polypropylene.

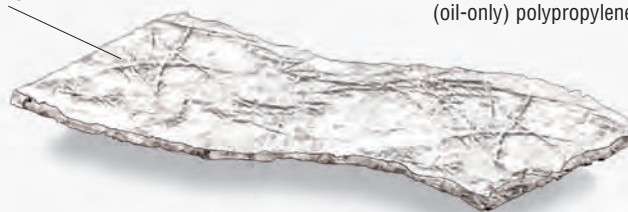

Static-Dissipative Mat Also Available

Specially Treated Mat in Easy-to-Identify Packaging

Ideal for absorbing volatile fuels in cold applications, dry, low-humidity areas or anywhere that the potential for sparking exists. Static-Dissipative Mat comes in a blue wrapper for quick identification when you need Mat where static electricity poses a risk.



Static-Dissipative Mats

☐ **White Static-Dissipative** (for oils, not water; deters static charges)

Item #	Description	Size	Units/Pkg	Absorbs/Pkg
WPX25H	HeavyWeight Pads	15"x19"	25	8.4 gal.
WPX50S	SingleWeight Pads	15"x19"	50	8.9 gal.
WRX150H	HeavyWeight Roll	30"x150'	1	63.4 gal.

MeltBlown Mats

☐ **White Oil-Only** (for oils, not water)

Item #	Description	Size	Units/Pkg	Absorbs/Pkg
WP100H	HeavyWeight Pads	15"x19"	100	33.4 gal.
WPK50H	HeavyWeight King Pads	30"x30"	50	52.8 gal.
WP100M	MediumWeight Pads	15"x19"	100	26.7 gal.
WP100S	SingleWeight Pads	15"x19"	100	17.9 gal.
WP200S	SingleWeight Pads	15"x19"	200	35.7 gal.
WR150H	HeavyWeight Roll	30"x150'	1	63.4 gal.
WRS150H	HeavyWeight Split Rolls	15"x150'	2	63.4 gal.
WR150M	MediumWeight Roll	30"x150'	1	50.7 gal.
WRS150M	MediumWeight Split Rolls	15"x150'	2	50.7 gal.
WR300S	SingleWeight Roll	30"x300'	1	67.9 gal.
WRS300S	SingleWeight Split Rolls	15"x300'	2	67.9 gal.

SonicBonded Mat Controls Spills and Overspray



Fast-acting SonicBonded Mat starts absorbing on contact. It's the best choice for overspray and soaking up spills.

Mat Index

Mat Name	Description	Page
HighLoft Mat	High sorbency for less	4
MeltBlown Mat	Quickly absorbs oil	6
SonicBonded Mat	Controls spills	8
FineFiber Mat/Oil-Only	Speeds cleanup	10
FineFiber Mat/Universal	Grips floor	12
MultiLaminate Mat	Lasts longer	14
AirLaid Mat	Our most flexible Mat	16
SurvivorSeries™ Mat	Our toughest Mat	18
EcoTech™ Mat	75% recycled content	20
HazMat Mat	For unknown liquids	22

You are here

For more help choosing the right sorbent Mat, see our **Mat Selection Guide** on page 3.

Absorbs Overspray and Spills — Helps Keep Floors Dry and Safe

Fast-Acting for Quick Response

A layer of MeltBlown polypropylene creates high surface area that enables SonicBonded Mat to quickly soak up liquids.

High Absorbency Keeps It on the Job Longer

A random assembly of large-diameter MeltBlown poly fibers creates a lofty layer. Mat absorbs up to 37.3 oz. per 15" x 19" HeavyWeight Pad and 55.2 gallons per 150' HeavyWeight Roll. Choose Universal or Oil-Only.

Ultrasonic Bond Points Keep Mat Intact

Ultrasonic bond points fuse layers of fibers together — Mat keeps its shape even when completely saturated. Top layer of SpunBond fabric provides added strength.

Perforations Save Money

SpunBond top layer allows for better-defined perforations and cleaner, easier tear-offs. Rolls are perforated every 7.5" vertically and 17" horizontally. Pads are perforated vertically at 7.5".



Helps you comply with 29 CFR 1910.22(a)(2), 29 CFR 1910.107(b)(3), 29 CFR 1910.107(g)(2), 29 CFR 1910.120(j)(1) and 29 CFR 1910.1450(e). See page 67 for details.