
EDGE-O-DOCKLEVELER - FM-2566

APPROX WEIGHT: 510.89 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAG

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

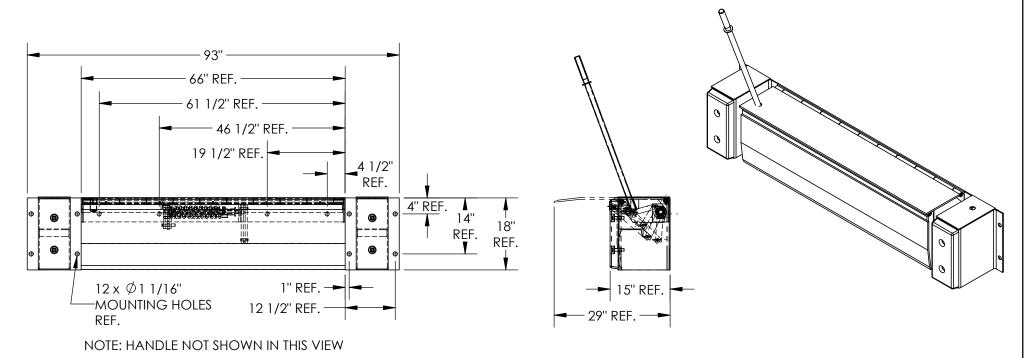

STANDARD FEATURES

MODEL NUMBER IS FM-2566
RAMP WIDTH IS 66", OVERALL WIDTH WITH BUMPERS IS 93"
MAX CAPACITY IS 25,000 LBS
STANDARD TOE GUARDS
GREASE ZERK FITTINGS
18" HIGH BUMPERS (TO SERVE LOW TRUCKS)
ADJUSTABLE TORSION SPRING COUNTERBALANCE MECHANISM SERVICE RANGE OF 5" ABOVE AND BELOW DOCK
UNIT COMES WITH HANDLE AND BUMPERS

EDGE-O-DOCKS & DOCK SEALS OR SHELTERS CAN BE USED TOGETHER. DOCK SEALS OR SHELTERS REQUIRE A 20" MINIMUM PROJECTION.

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE + 1/4"

DIMENSION TOLLIVANOL 1 174					
A P P R O V	REQU REQU COM	CONFIRM P IPLIANCE WIT ND LOCAL RI SPECIAL U	ATISFIES DE ALSO ACK RODUCT A TH ALL APF EGULATIO JNITS AI	SIGN AND [NOWLEDG! AND INSTALL PLICABLE FEI NS AND STA	DIMENSION E MY DUTY TO ATION DERAL, STATE NDARDS. ETURNABLE
A	Signed:				_Date:
L	LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING				
DISTR	IBUTOR'S NAA	ΛE:			P.O.# X
VESTIL MANUFAC			CTURIN	IG	W.O.# X
DRAWN BY: M.WILSON			DATE: 1/2	2/2012	SALES: X
REFER	RENCE: X			SCALE: 1:24 FILE NAME:	
QUOTED LEAD TIME: X			QUOTE #	I	07-007-007