


Miller HP™ & Miller Positioning and Restraint Lanyards

Rope, Wire Rope and Web Lanyards recommended for "work positioning" and "restraint" only.

FEATURES

- **Rope lanyards** are available in standard nylon or polyester (for greater chemical resistance) to meet user needs
- **Wire rope lanyards** are heat resistant and highly abrasion resistant
- **Standard web lanyards** are economical, abrasion resistant and easy to clean

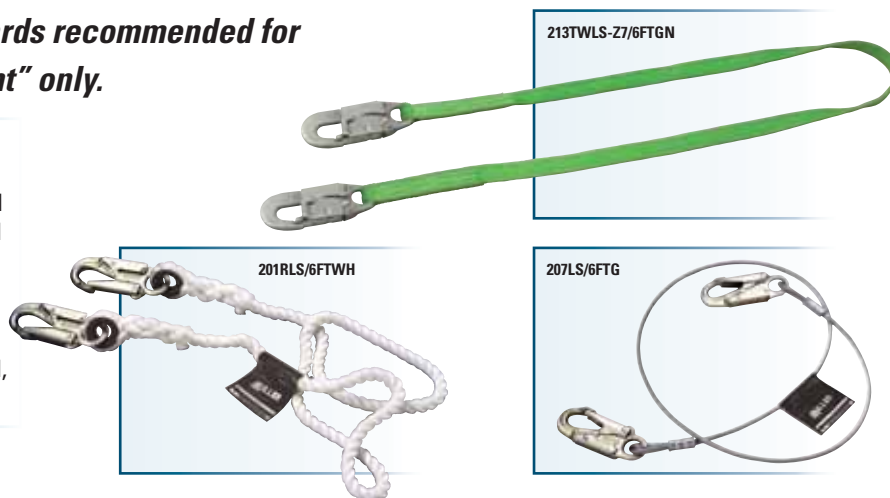

SKU	Material	Harness Connection	Anchorage Connection	Special Feature	Length*
MILLER HP POSITIONING AND RESTRAINT LANYARDS					
ANSI Z359					
210TWLS-Z7/6FTGN	Webbing	Locking snap hook	Locking snap hook	Adjustable	6-ft. (1.8 m)
213TWLS-Z7/6FTGN	Webbing	Locking snap hook	Locking snap hook	—	6-ft. (1.8 m)
8928-Z7/18INBK	D-ring extension				
MILLER POSITIONING AND RESTRAINT LANYARDS					
ANSI A10.32					
198RLS/6FTWH**	Nylon rope	Choke-off loop	Locking snap hook	—	6-ft. (1.8 m)
201RLS/6FTWH**	Nylon rope	Locking snap hook	Locking snap hook	—	6-ft. (1.8 m)
202RRS/6FTWH**	Nylon rope	Locking snap hook	Locking rebar hook	—	6-ft. (1.8 m)
203RLS/6FTWH**	Nylon rope	Locking snap hook	Locking snap hook	Adjustable	6-ft. (1.8 m)
204RLS/6FTWH**	Nylon rope	Locking snap hook	Thimble for attaching a carabiner	—	6-ft. (1.8 m)
207LS/6FTG	Wire rope	Locking snap hook	Locking snap hook	—	6-ft. (1.8 m)
207NLS/6FTV	Vinyl-coated wire rope	Locking snap hook	Locking snap hook	—	6-ft. (1.8 m)
210WLS/6FTYL	Polyester webbing	Locking snap hook	Locking rebar hook	Adjustable	6-ft. (1.8 m)
212WLS/6FTYL	Polyester webbing	Locking snap hook	Web loop	—	6-ft. (1.8 m)
213WLS/6FTYL	Polyester webbing	Locking snap hook	Locking snap hook	—	6-ft. (1.8 m)
226WRS/6FTYL	Polyester webbing	Locking snap hook	Locking rebar hook	—	6-ft. (1.8 m)

*Additional lengths are available. **To order polyester rope, add "-5" to the corresponding model number (Ex: 201RLS/6FTWH becomes 201RLS-5/6FTWH). Locking Snap Hook – 3/4-in. (19 mm) gate opening; Locking Rebar Hook – 2-1/2-in. (64 mm) gate opening.

Miller Positioning Assemblies



6756RS-Z7



6757WRS-Z7/35INGN

SKU	Description
MILLER POSITIONING ASSEMBLIES	
ANSI Z359	
6756RS-Z7	Rebar chain assembly w/locking rebar hook, attached swivel & two locking snap hooks
6757WRS-Z7/35INGN*	Rebar web assembly w/locking rebar hook & two locking snap hooks
ANSI A10.32	
6756RS/	Rebar chain assembly w/two locking snap hooks & one locking rebar hook; swivel attachment & length adjuster
6756RS4/	4-link rebar chain assembly w/two locking snap hooks & one locking rebar hook; swivel attachment
6757WRS/35INGN*	1-in. (25 mm) nylon web positioning assembly w/two locking snap hooks & one locking rebar hook

*Also available in 27-in. (685 mm) or 40-in. (1016 mm) lengths. Locking Snap Hook – 3/4-in. (19 mm) gate opening; Locking Rebar Hook – 2-1/2-in. (64 mm) gate opening.