

SHOCK ABSORBING LANYARDS



ShockWave™2 is uniquely designed to expand and contract (6 ft. to 4-1/2 ft.), in reaction to a worker's movements. The tubular web stays out of your way when not in use, avoiding trips and snags. A built-in impact indicator provides easy visual evidence if the shock has been impact loaded through a fall or improper use. It limits the average fall arresting forces to 900 lbs. (4kN).



1244306

SHOCKWAVE™2 LANYARD

Single-leg with snap hooks at each end x 6 ft. (1.8 m).



1244321

SHOCKWAVE™2 LANYARD

Single-leg with snap hook and steel rebar hook x 6 ft. (1.8 m).



1244448

SHOCKWAVE™2 100% TIE-OFF LANYARD


Double-leg with snap hook and Saflok Max™ hooks on leg ends x 6 ft. (1.8 m).



1244409

SHOCKWAVE™2 100% TIE-OFF LANYARD

Double-leg with snap hook and aluminum rebar hooks on leg ends x 6 ft. (1.8 m).

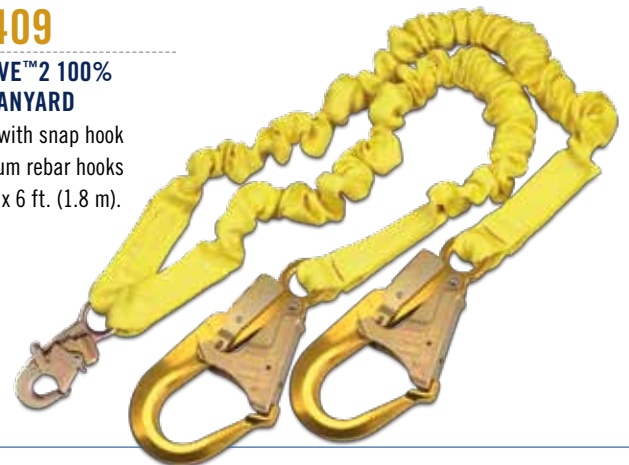

SHOCKWAVE™2 LANYARDS

1244311 Single-leg with snap hook and aluminum rebar hook x 6 ft. (1.8 m).

1244360 Single-leg with snap hook and Saflok Max™ hook x 6 ft. (1.8 m).

1244406 Double-leg with snap hooks at each end x 6 ft. (1.8 m).

1244412 Double-leg with snap hook and flat steel rebar hooks x 6 ft. (1.8 m).