

INDUSTRIAL GRADE FLOOR FANS

Ideal for use in offices, stores, garages, warehouses and any other industrial space that needs powerful air circulation.

PRODUCT INFORMATION

Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9224, 9230)

3-speed, 1/6 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9220, 9218, 9219)

3-speed, 1/20 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (model 9214)

3-speed, 1/25 HP, 120V, 1 phase, open motor, sleeve bearing, permanent split capacitor (model 9212)

Controls

Rear mounted rotary switch

Power Cord

Black, 10', 3-conductor, SJT type (models 9224, 9230)

Black, 9', 3-conductor, SJT type (models 9220, 9218, 9219, 9214, 9212)

Coating

Blade, Guard, and Mounts are powder coated steel



Compliance

ETL, OSHA


Height

Adjustments of 26" and 28" (model 9219)

Roll-About Stand w/Fan
9219

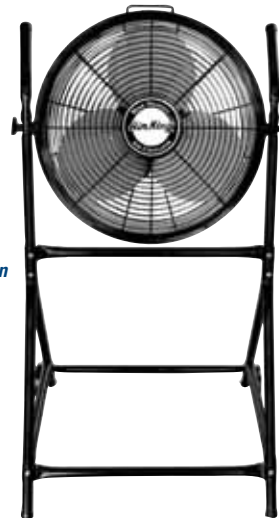

Pivoting Floor Fan
9220, 9218, 9214, 9212



Pivoting Floor Fan
9230, 9224

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9230	30" Pivoting Floor Fan	30"	33.75"L x 12.25"W x 35.5"H	48.3	8.63	\$340.00
9224	24" Pivoting Floor Fan	24"	27"L x 12"W x 28.75"H	41.8	5.69	\$320.00
9220	20" Pivoting Floor Fan	20"	25.75"L x 12.5"W x 25"H	24.0	4.46	\$175.00
9219	18" Roll-About Stand w/Fan	18"	24"L x 25"W x 48"H	27.9	4.44	\$221.00
9218	18" Pivoting Floor Fan		22"L x 9.69"W x 22"H	21.4	3.17	\$165.00
9214	14" Pivoting Floor Fan	14"	18.69"L x 9"W x 18"H	13.6	1.98	\$139.00
9212	12" Pivoting Floor Fan	12"	15.5"L x 8.5"W x 16.5"H	12.1	1.43	\$118.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9230	30" 1/4 HP	7400	6360	4980	1110	975	822	2.04	1.81	1.60	234	206	176	75	71	67
9224	24" 1/4 HP	5130	4490	3670	1500	1250	1000	2.03	1.81	1.63	229	200	176	72	69	64
9220	20" 1/6 HP	3670	3330	2940	1500	1310	1050	1.60	1.30	1.10	184	155	130	62	55	48
9219	18" 1/6 HP	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9218	18" 1/6 HP	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9214	12" 1/20 HP	1650	1470	1180	1498	1296	934	.58	.50	.44	63	56	48	58	55	48
9212	12" 1/25 HP	1360	1170	1010	1500	1200	900	.77	.63	.53	85	76	64	56	49	42

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

