

# INDUSTRIAL GRADE FLOOR FANS

Ideal for use in offices, stores, garages, warehouses and any other industrial space that needs powerful air circulation.

## PRODUCT INFORMATION

### Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9224, 9230)

3-speed, 1/6 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9220, 9218, 9219)

3-speed, 1/20 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (model 9214)

3-speed, 1/25 HP, 120V, 1 phase, open motor, sleeve bearing, permanent split capacitor (model 9212)

### Controls

Rear mounted rotary switch

### Power Cord

Black, 10', 3-conductor, SJT type (models 9224, 9230)

Black, 9', 3-conductor, SJT type (models 9220, 9218, 9219, 9214, 9212)

### Coating

Blade, Guard, and Mounts are powder coated steel



### Compliance

ETL, OSHA

### Height

Adjustments of 26" and 28" (model 9219)

Roll-About Stand w/Fan  
9219

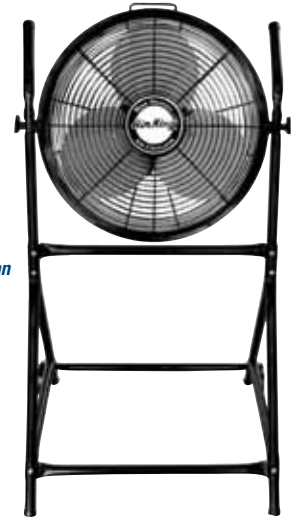

Pivoting Floor Fan  
9220, 9218, 9214, 9212



Pivoting Floor Fan  
9230, 9224

## SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9230	30" Pivoting Floor Fan	30"	33.75"L x 12.25"W x 35.5"H	48.3	8.63	\$340.00
9224	24" Pivoting Floor Fan	24"	27"L x 12"W x 28.75"H	41.8	5.69	\$320.00
9220	20" Pivoting Floor Fan	20"	25.75"L x 12.5"W x 25"H	24.0	4.46	\$175.00
9219	18" Roll-About Stand w/Fan	18"	24"L x 25"W x 48"H	27.9	4.44	\$221.00
9218	18" Pivoting Floor Fan		22"L x 9.69"W x 22"H	21.4	3.17	\$165.00
9214	14" Pivoting Floor Fan	14"	18.69"L x 9"W x 18"H	13.6	1.98	\$139.00
9212	12" Pivoting Floor Fan	12"	15.5"L x 8.5"W x 16.5"H	12.1	1.43	\$118.00

## PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9230	30" 1/4 HP	7400	6360	4980	1110	975	822	2.04	1.81	1.60	234	206	176	75	71	67
9224	24" 1/4 HP	5130	4490	3670	1500	1250	1000	2.03	1.81	1.63	229	200	176	72	69	64
9220	20" 1/6 HP	3670	3330	2940	1500	1310	1050	1.60	1.30	1.10	184	155	130	62	55	48
9219	18" 1/6 HP	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9218	18" 1/6 HP	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9214	12" 1/20 HP	1650	1470	1180	1498	1296	934	.58	.50	.44	63	56	48	58	55	48
9212	12" 1/25 HP	1360	1170	1010	1500	1200	900	.77	.63	.53	85	76	64	56	49	42

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

