

INDUSTRIAL-GRADE MULTI MOUNT FANS

Fan can be mounted on walls, ceilings, I-beams and more, making it perfect for loading docks, restaurants, plants, health clubs and industrial areas where floor/table space is limited.

PRODUCT INFORMATION

Motor

3-speed, 1/6 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9318)

3-speed, 1/20 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (model 9314)

3-speed, 1/25 HP, 120V, 1 phase, open motor, sleeve bearing, permanent split capacitor (model 9312)

Controls

Rear mounted pull cord switch

Power Cord


Black, 9', 3-conductor, SJT type (models 9318, 9314, 9312)

Coating


Blade, Guard, and Mounts are powder coated steel

Compliance

ETL, OSHA

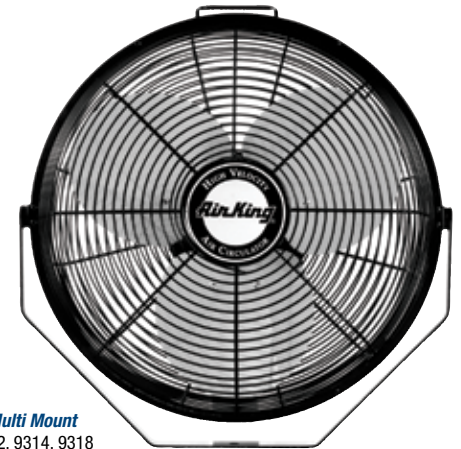

Multi Mount
9312, 9314, 9318

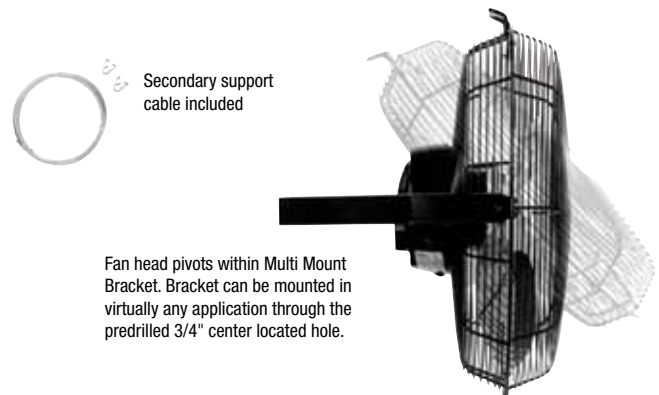

Secondary support
cable included

Fan head pivots within Multi Mount Bracket. Bracket can be mounted in virtually any application through the predrilled 3/4" center located hole.

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9318	18" Multi Mount Fan	18"	21.5"L x 16"W x 21"H	21.4	2.85	\$170.00
9314	14" Multi Mount Fan	14"	18"L x 8.88"W x 18.25"H	14.3	1.85	\$143.00
9312	12" Multi Mount Fan	12"	15"L x 12"W x 15"H	11.5	1.39	\$129.00



PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9318	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9314	1650	1470	1180	1498	1296	934	.58	.50	.44	63	56	48	58	55	48
9312	1360	1170	1010	1545	1205	900	.77	.63	.53	85	76	64	56	49	42

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

