

Miller Confined Space and Rescue Systems

All Confined Space Systems include a Miller Tripod, Miller MightEvac® Unit, a pulley, carabiner and two heavy-duty equipment bags. Systems with a ManHandler® Hoist/Winch also available.



Length of Wire Rope	Miller MightEvac Unit w/7-ft. (2 m) Tripod & Mounting Bracket	Miller MightEvac Unit w/7-ft. (2 m) Tripod, Mounting Bracket & ManHandler Hoist	Miller MightEvac Unit w/9-ft. (2.7 m) Tripod & Mounting Bracket	Miller MightEvac Unit w/9-ft. (2.7 m) Tripod, Mounting Bracket & ManHandler Hoist
ANSI Z359				
50-ft. (15 m)	MR50GC-Z7/50FT	—	—	—
100-ft. (30 m)	MR100GC-Z7/100FT	—	—	—
130-ft. (40 m)	MR130GC-Z7/130FT	—	—	—
ANSI A10.32				
50-ft. (15 m)	MR50GC/50FT	MR50GCM/50FT	MR50GX/50FT	MR50GXM/50FT
100-ft. (30 m)	MR100GC/100FT	—	MR100GX/100FT	—
130-ft. (40 m)	MR130GC/130FT	—	MR130GX/130FT	—


Meets all applicable OSHA, ANSI and CSA standards.

For stainless steel wire rope, change the "G" to an "S" in the corresponding model number (Ex: MR50GC/50FT becomes MR50SC/50FT).

Note: ManHandler Hoist is only available in 65-ft. (18 m) and 100-ft. (30 m) lengths.

Miller Rope Grabs

Miller rope grabs move easily up and down vertical lifelines to provide continuous fall protection. Trailing models offer complete hands-free operation for increased productivity. In the event of a fall, Miller rope grabs lock quickly. Compact design; corrosion-resistant stainless steel construction.

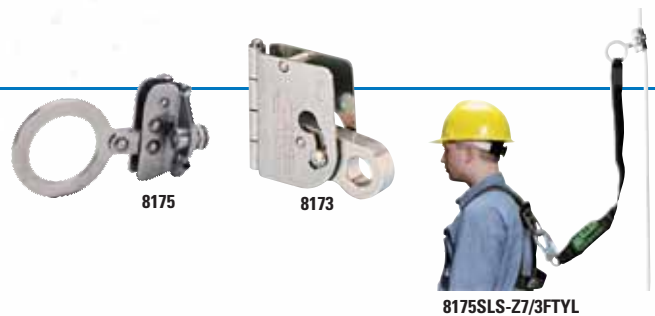

SKU	Description
ANSI Z359	
8175-Z7/	Trailing Rope Grab – Stainless steel trailing rope grab w/anti-panic feature for use with 5/8-in. (16 mm) rope
8175SLS-Z7/3FTYL	Trailing Rope Grab – 8175-Z7/ with attached 3-ft. (1 m) SofStop shock-absorber for use with 5/8-in. (16 mm) rope
ANSI A10.32	
8172/U*	Miller MicroLoc Trailing Rope Grab – Compact, stainless steel trailing wire rope grab for use with 5/16-in. (8 mm) wire rope
8173/U*	Miller MicroLoc Trailing Rope Grab – Compact, stainless steel trailing rope grab for use with 5/8-in. (16 mm) rope
8174/U*	Manual Rope Grab – Stainless steel manual rope grab for use with 5/8-in. (16 mm) or 3/4-in. (19 mm) synthetic rope
8174/C	Manual Rope Grab – Stainless steel manual rope grab w/anti-panic feature for use with 5/8-in. (16 mm) or 3/4-in. (19 mm) synthetic rope
8175/U*	Trailing Rope Grab – Stainless steel trailing rope grab for use with 5/8-in. (16 mm) rope
8175/C	Trailing Rope Grab – Stainless steel trailing rope grab w/anti-panic feature for use with 5/8-in. (16 mm) rope

Note: Locking snap hook – 3/4-in. (19 mm) gate opening. Meets all applicable OSHA, ANSI and CSA Standards. *Does not meet CSA requirements.

VERTICAL LIFELINES

Standard lifeline lengths are 25 ft. (7.6 m), 50 ft. (15 m), 75 ft. (23 m), and 100 ft. (30 m); additional lengths are available.

SKU	Description
194R-2	Nylon rope lifeline with carabiner & thimble; 5/8-in. (16 mm) diameter
194R-5	Polyester rope lifeline for greater chemical resistance with carabiner & thimble; 5/8-in. (16 mm) diameter
195R-2	Nylon rope lifeline with thimbles; 5/8-in. (16 mm) diameter
195R-5	Polyester rope lifeline for greater chemical resistance with thimbles; 5/8-in. (16 mm) diameter
300L	Polypropylene blend rope lifeline with locking snap hook & loop; 5/8-in. (16 mm) diameter

ACCESSORY ITEM

SKU	Description
913WLS/3FT	3-ft. (1 m) nylon web lanyard w/SofStop shock absorber and two locking snap hooks

Note: Locking snap hook – 3/4-in. (19 mm) gate opening. Meets OSHA, ANSI A10.32 and CSA Standards.

