



Titan™ Pack-Type Shock-Absorbing and Stretch Pack-Type Shock-Absorbing Lanyards



Titan Pack-Type Shock-Absorbing Lanyards include the shock absorber pack as an integral part of a standard lanyard. In the event of a fall, the pack smoothly expands to reduce fall forces while a back-up safety strap deploys for added fall protection.

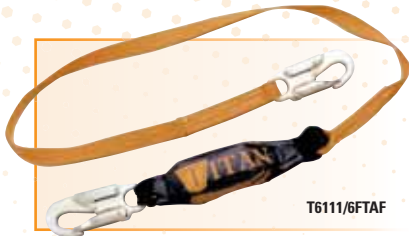

Titan Stretch Pack-Type Shock-Absorbing Lanyards contract from 6-ft. (1.8 m) to 4-ft. (1.2 m) to reduce tripping hazard and smoothly expand to reduce fall forces while a back-up safety strap deploys for added fall protection.

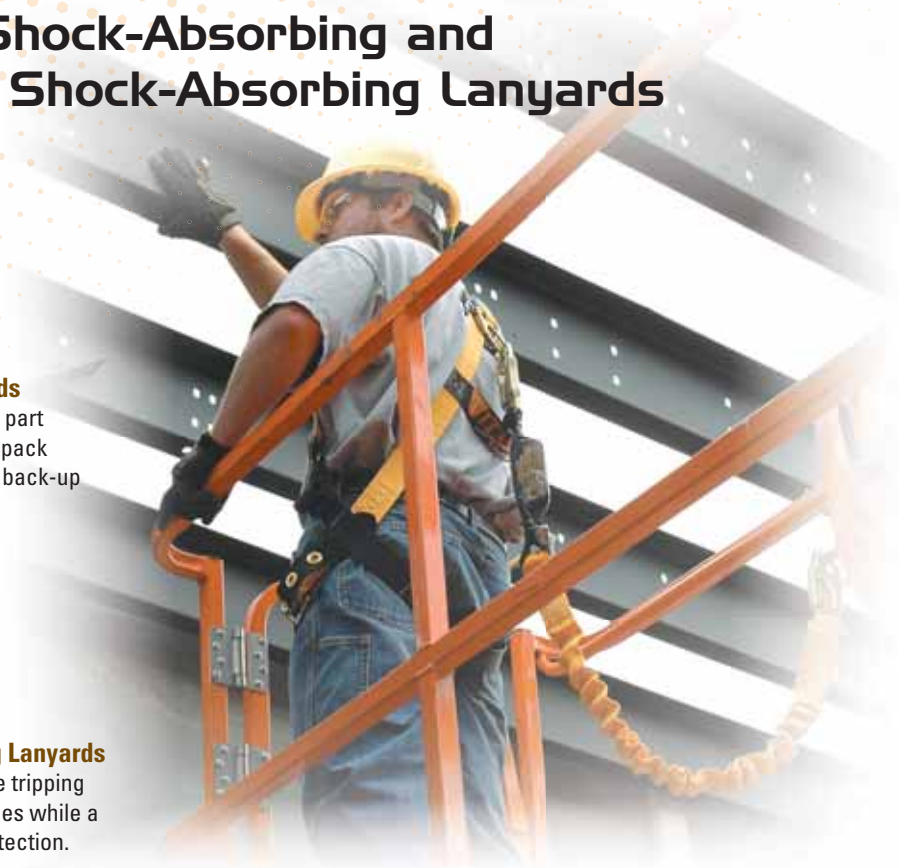

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Standard Length*
■ TITAN PACK-TYPE SHOCK-ABSORBING LANYARDS					
ANSI A10.32					
T6111/6FTAF	Webbing	One	Locking snap hook	Locking snap hook	6-ft. (1.8 m)
T6111V/6FTAF	Webbing	One	Locking snap hook	Locking snap hook	Adjustable: 4-ft. (1.2 m) to 6-ft. (1.8 m)
T6112/6FTAF	Webbing	One	Locking snap hook	Large locking rebar hook	6-ft. (1.8 m)
T6112V/6FTAF	Webbing	One	Locking snap hook	Large locking rebar hook	Adjustable: 4-ft. (1.2 m) to 6-ft. (1.8 m)
T6113/6FTAF	Webbing	One	Locking snap hook	Small locking rebar hook	6-ft. (1.8 m)
T6121/6FTAF	Webbing	Two	Locking snap hook	Locking snap hooks	6-ft. (1.8 m)
T6122/6FTAF	Webbing	Two	Locking snap hook	Large locking rebar hooks	6-ft. (1.8 m)
T6123/6FTAF	Webbing	Two	Locking snap hook	Small locking rebar hooks	6-ft. (1.8 m)
■ TITAN STRETCH PACK-TYPE SHOCK-ABSORBING LANYARDS					
ANSI A10.32					
T6111SS/6FTAF	Webbing	One	Locking snap hook	Locking snap hook	Contracts 6-ft. (1.8 m) to 4-ft. (1.2 m)
T6112SS/6FTAF	Webbing	One	Locking snap hook	Large locking rebar hook	Contracts 6-ft. (1.8 m) to 4-ft. (1.2 m)
T6121SS/6FTAF	Webbing	Two	Locking snap hook	Locking snap hooks	Contracts 6-ft. (1.8 m) to 4-ft. (1.2 m)
T6122SS/6FTAF	Webbing	Two	Locking snap hook	Large locking rebar hooks	Contracts 6-ft. (1.8 m) to 4-ft. (1.2 m)

*Available in lengths from 3-ft. (0.91 m) to 10-ft. (3 m). Locking Snap Hook – 3/4-in. (19 mm) gate opening. Small locking rebar hook – 1-3/4-in. (44 mm) gate opening. Large locking rebar hook – 2-1/2-in. (64 mm) gate opening.

Titan™ Compact Retractable Web Lanyards

Designed for applications requiring up to 8-ft. (2.4 m) working length, the Titan Retractable Web Lanyard is lightweight and dependable.

SKU	Description	Weight
■ TITAN COMPACT RETRACTABLE WEB LANYARDS		
ANSI A10.32		
TRW/8FT	8-ft. (2.4 m) webbing retractable lanyard	2.5 lbs. (1.1 kg)
TRWS/8FT	8-ft. (2.4 m) webbing retractable lanyard w/top swivel	2.7 lbs. (1.2 kg)

