

Miller Retractable Web Lanyards

Designed for limited-range applications, the **Miller Retractable Web Lanyard** is lightweight and dependable.



SKU	Description	Weight
MILLER RETRACTABLE WEB LANYARDS		
ANSI A10.32		
8327/10FTYL	Compact, retractable lanyard with up to 10-ft. (3 m) of polyester webbing, complete with a top-swivel shackle, carabiner & a locking snap hook with 3/4-in. (19 mm) gate opening	3.7 lbs. (1.7 kg)
8327A/10FTYL	Same as model 8327/10FTYL, except without the carabiner	3.7 lbs. (1.7 kg)
AD6902/8FTYL	Same as model 8327/10FTYL, except with carabiners at the anchorage & lanyard ends, 8 ft. (2.4 m)	3.7 lbs. (1.7 kg)

Miller "O-Ring" Option

OSHA regulation 1926.502, Section (d) personal fall arrest systems, paragraph (6) states that ...

"snap hooks shall not be engaged to a D-ring to which another snap hook or other connector is attached."

This means a retractable unit and a lanyard cannot simultaneously be attached to the same harness back D-ring.

Since it is potentially dangerous, difficult and time-consuming to switch back and forth from a lanyard to a retractable, the Miller Lanyard "O-ring" option solves this concern by allowing the retractable to be attached to the lanyard O-ring, while the lanyard remains connected to the back D-ring of the harness. This eliminates the need to continually change attachment points from a lanyard to a retractable. The placement of the O-ring is designed so that if a fall occurs, the lanyard shock absorber will not engage and the retractable unit will arrest the fall.

Note: The Lanyard O-Ring Option is available on any Miller shock-absorbing lanyard, single- or double-legged lanyards. To order, add an "O" as a suffix to the model number (Ex: 913B0; 913SS0).



Miller BackBiter® Tie-Back Lanyards

The innovative **Miller BackBiter Tie-Back Lanyard with the Miller 5K® Snap Hook** was designed from top to bottom for tie-back use.




Featuring the Miller 5K® Snap Hook

FEATURES

- First snap hook with a 5,000-lb. (22 kN) gate load capacity from any angle
- All-in-one lanyard with SofStop® Shock Absorber and cross-arm anchorage connector
- SofStop Shock Absorber pack is designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces
- Heavy-duty polyester webbing and Cordura® nylon webbing with five times more abrasion resistance



913B/6FTGN

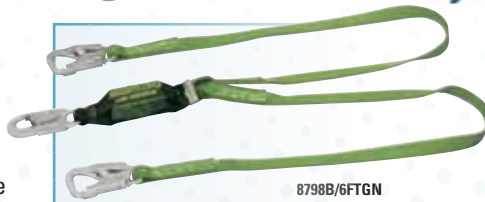

8798B/6FTGN

TIE-BACK SAFELY!

Always Know Your Fall Clearance Pg. 20

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Standard Length
MILLER BACKBITER TIE-BACK LANYARDS					
ANSI Z359					
913B/6FTGN*	Webbing	One	Locking snap hook	Locking 5K snap hook	6-ft. (1.8 m)
8798B/6FTGN*	Webbing	Two	Locking snap hook	Locking 5K snap hooks	6-ft. (1.8 m)

*In Canada, add a "C" to the SKU (ie. 913B/6FTGN(C)). Locking Snap Hook – 3/4-in. (19 mm) gate opening. Cordura is a registered trademark of E. I. DuPont.