

Washdown Scale

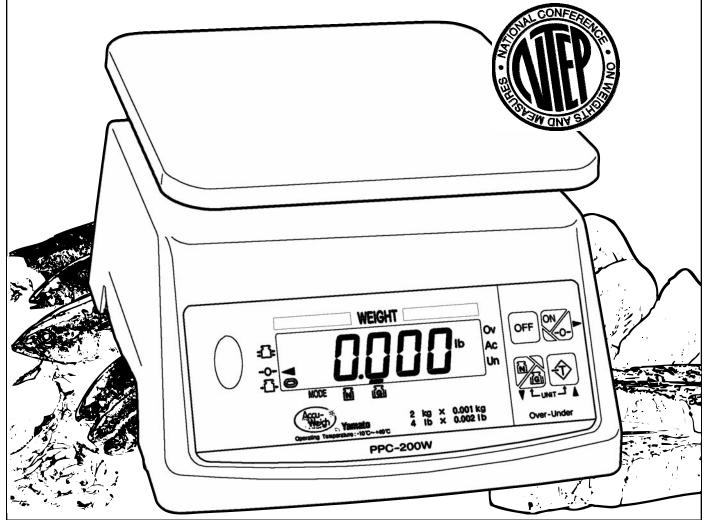



Combining washdown capability with an easy to read Over/Under indictor and a portable design.

All at an affordable price.

PPC-200W

Electronic Scale

Washdown Over/Under Indicator

Portion Control Accurate

Application

With Over/Under checkweighing, high accuracy, a portable wireless design, and washdown capability; the PPC-200W is perfectly suited for use in the poultry, seafood and meat processing industries. The most affordable washdown scale in the world, with exceptional quality and features.

Features


- Washdown Capability
- Over/Under Indicator
- Large Removable Stainless Steel Platform
- Accurate 2000 Divisions
- Large LCD Display
- Battery Operation
- Auto Zero Setting Mechanism
- Initial Zero Setting Mechanism
- Auto Shut-Off
- Push Button
 On, Off, Net/Gross,
 Tare, & Unit Toggle
- LCD Indicators
 Net/Gross, Center of Zero,
 Stable, & Low Battery
- USDA Accepted


Specifications

Model	PPC-200W		
Accuracy Clas	ss	Class III	2000 Divisions
Certificate of Conformance #		98-125A1	
Capacity and Division	Pound/Ounce NOT Legal for Trade	Decimal Pound 4 lb x 0.002 lb 10 lb x 0.005 lb 20 lb x 0.01 lb 40 lb x 0.02 lb Pound / Ounce 5 lb x 0.05 oz 10 lb x 0.1 oz 20 lb x 0.2 oz 50 lb x 0.5 oz	2 kg x 0.001 kg 4 kg x 0.002 kg 10 kg x 0.005 kg 20 kg x 0.01 kg
Weighing System		Strain Gauge Load Cell	
Platform	9 x 9 (230 x 230); Stainless Steel		
Indicator	Liquid Crystal Display: 5 Digits plus indicators Character size: 0.9 x 0.5 (23 x 12)		
Power Supply	9 Volt DC; 6 "D" size batteries (not included)		
Battery Life	1000 Hours of Continuous Use (alkaline batteries)		
Operating Ten	np.	14 °F ~ 104 °F (-10 C ~ 40 C)	


All dimensions are approximate. Dimensions are given in inches (millimeters.)

Dimensions





Indicator / Keyboard



11 lb (5 kg)



YAMATO CORPORATION

1775 S. Murray Blvd. Colorado Springs, CO 80916 USA Tel (719) 591-1500 Fax (719) 591-1045

YAMATO TECH CORPORATION

#112-19425 Langley By-Pass Surrey, B.C. V3S 6K1 Canada Tel (604) 533-2338 Fax (604) 533-0827

Shipping Weight