

Miller Manyard® II Stretchable Shock-Absorbing Lanyards


FEATURES

- **Manyard II Lanyards** contract 6-ft. (1.8 m) to 4-ft. (1.2 m), greatly reducing the chances of tripping, snagging, or dragging
- Specially-woven shock-absorbing inner core smoothly expands to reduce fall arrest forces
- A heavy-duty outer jacket serves as a wear indicator and back-up strap to the red inner core for added safety
- Working load of 310-lbs. (140.6 kg) and features a warning flag to indicate that it has arrested a fall

REDUCES TRIPPING
HAZARD



216M-Z7/6FTGN

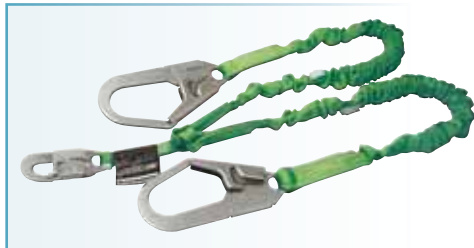


231M-Z7/6FTGN



Manyard II Shock-Absorbing Lanyard: Before and After Deployment

Always know your fall distance and select proper equipment to meet the fall clearance. See page 20 for details.

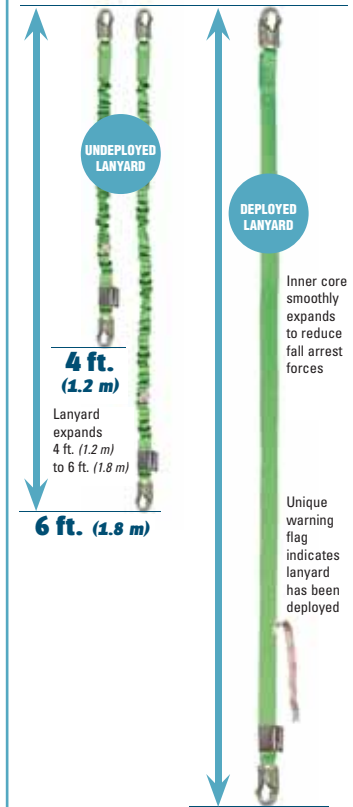

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Standard Length*
MILLER MANYARD II STRETCHABLE SHOCK-ABSORBING LANYARDS						
ANSI Z359						
216M-Z7/6FTGN	Webbing	One	Locking snap hook	Locking snap hook	Warning flag / Red core wear indicator	6-ft. (1.8 m)
219M-Z7/6FTGN	Webbing	One	Locking snap hook	Locking rebar hook	Warning flag / Red core wear indicator	6-ft. (1.8 m)
231M-Z7/6FTGN	Webbing	Two	Locking snap hook	Locking rebar hooks	Warning flag / Red core wear indicator	6-ft. (1.8 m)
232M-Z7/6FTGN	Webbing	Two	Locking snap hook	Locking snap hooks	Warning flag / Red core wear indicator	6-ft. (1.8 m)
233MORS-Z7/6FTGN	Webbing	One	Choke-off loop & "O" Ring extension	Locking rebar hook	Warning flag / Red core wear indicator	6-ft. (1.8 m)
ANSI A10.32						
216M/6FTGN	Webbing	One	Locking snap hook	Locking snap hook	Warning flag / Red core wear indicator	6-ft. (1.8 m)
219M/6FTGN	Webbing	One	Locking snap hook	Locking rebar hook	Warning flag / Red core wear indicator	6-ft. (1.8 m)
231M/6FTGN	Webbing	Two	Locking snap hook	Locking rebar hooks	Warning flag / Red core wear indicator	6-ft. (1.8 m)
232M/6FTGN	Webbing	Two	Locking snap hook	Locking snap hooks	Warning flag / Red core wear indicator	6-ft. (1.8 m)
233M/6FTGN	Webbing	One	Choke-off loop	Locking snap hook	Warning flag / Red core wear indicator	6-ft. (1.8 m)

*Available in lengths from 4-ft. (1.2 m) to 10-ft. (3 m).
Locking Snap Hook – 3/4-in. (19 mm) gate opening; Locking Rebar Hook – 2-1/2-in. (64 mm) gate opening.